


Profile

A 11SUPERLIGHT

Professional Aluminum Boats

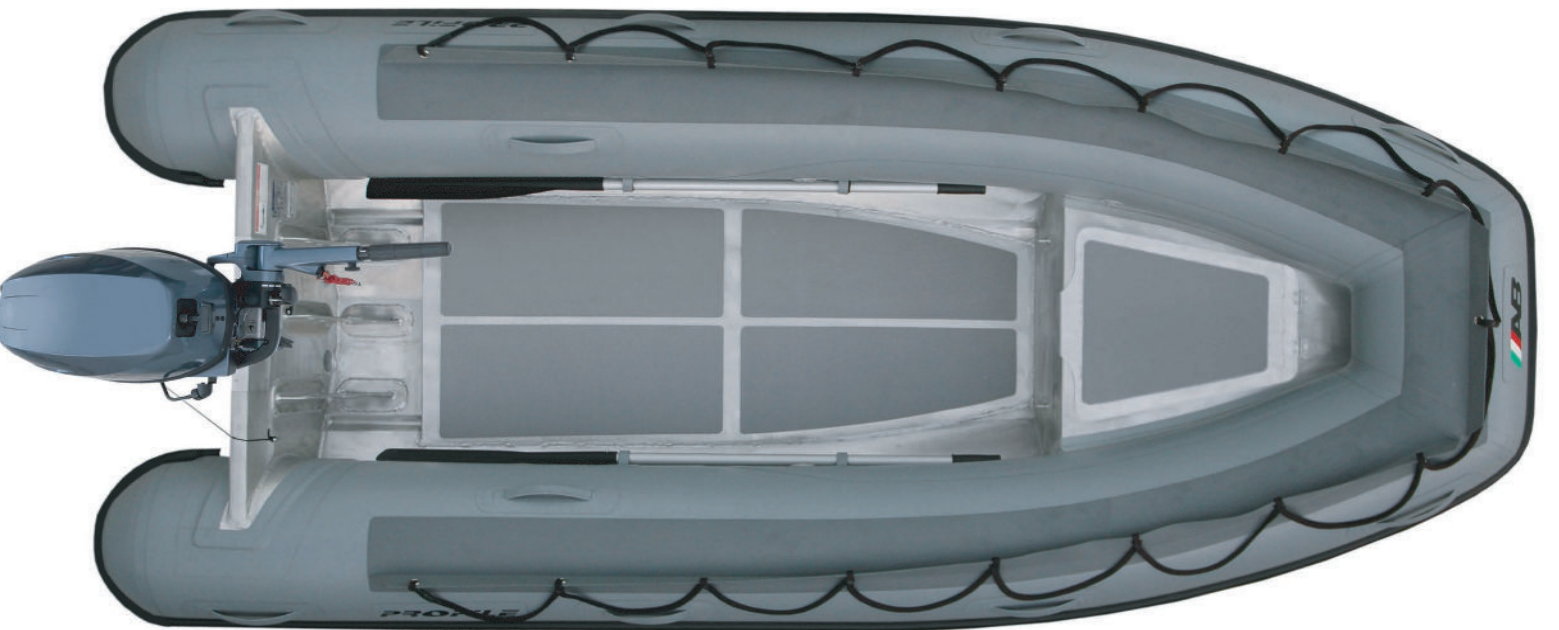

SPECS	Overall Length	: 11'6" / 3.50m	Number of Chambers	: 3	Shaft Length	: 20" / 50.8cm
	Overall Beam	: 5'7" / 1.70m	Person Capacity	: 6	RDC Design Category	: C
	Inside Length	: 8'6" / 2.60m	Weight	: 214lb / 97kg		
	Inside Beam	: 2'8" / 0.81m	Recommended HP	: 20hp / 14.9kw		
	Tube Diameter	: 17" / 0.43m	Maximum HP	: 30hp / 22.4kw		


STANDARDS FEATURES	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Stringer System Welded Under Aluminum Deck</li><li>■ Life Line Around Tube</li><li>■ Non - Skid(CSM) Coated Fabric on Tube's Surface</li><li>■ Pressure Relief Valves</li><li>■ Drain Scuppers</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate</li></ul>	<ul style="list-style-type: none"><li>■ Aluminum Bow Eye</li><li>■ 4 Aluminum Davit Lifting Points</li><li>■ Aluminum Transom Tie Down &amp; Towing Rings</li><li>■ Aluminum Bow Tie Down &amp; Towing Rings</li><li>■ Deck Drain with Plug</li><li>■ Heavy Duty 1670 DacTex Orca(CSM) Five Layer Coated Fabric</li><li>■ Double Solid Rub Rails</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ 1 Front &amp; 4 Side Orca(CSM) Fabric Handles on Tubes</li></ul>	<ul style="list-style-type: none"><li>■ Paddles with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>
--------------------	--	--	--

OPTIONAL FEATURES	<ul style="list-style-type: none"><li>■ Tube Chaps</li><li>■ Boat Cover</li><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel Cleat</li><li>■ Lateral Fold Down Stainless Steel Cleat</li><li>■ Removable Rowing Seat</li><li>■ Fiberglass Console with Forward Seat</li><li>■ Fiberglass Console</li><li>■ Customized Aluminum Consoles &amp; Seats Upon Request</li></ul>	<ul style="list-style-type: none"><li>■ One Person Jockey Seat</li><li>■ Two Person Jockey Seat</li><li>■ Stainless Steel Helm Unit</li><li>■ Bow Locker/ Seat</li><li>■ Aluminum Console</li><li>■ Aluminum Lean On</li><li>■ 6 Gal. Portable Fuel Tank Installed in Bow Locker</li><li>■ Bench Seat with Storage</li></ul>
-------------------	---	--

Profile

A 12SUPERLIGHT

Professional Aluminum Boats

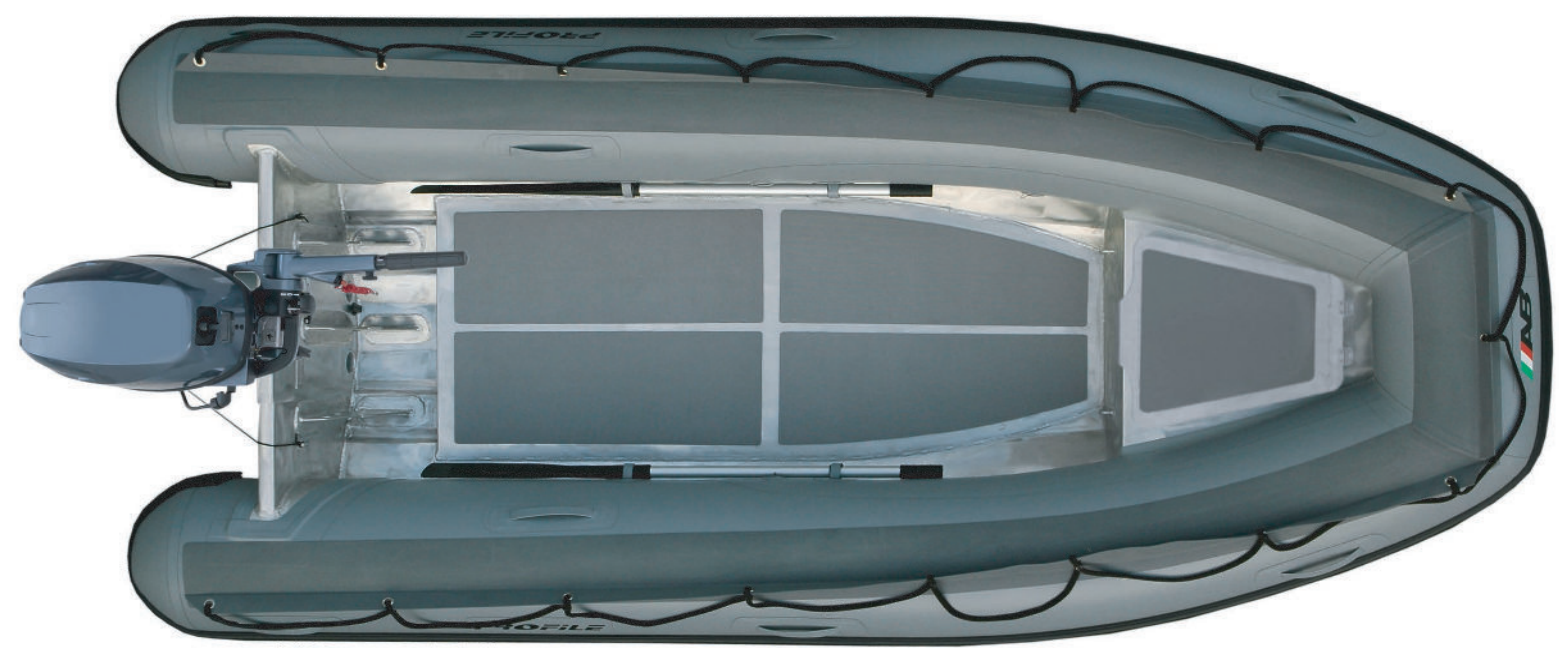

S P E C S	Overall Length	: 12' / 3.66m	Number of Chambers	: 3	Shaft Length	: 20" / 50.8cm
	Overall Beam	: 6'1" / 1.85m	Person Capacity	: 6	RDC Design Category	: C
	Inside Length	: 8'10" / 2.70m	Weight	: 231lb / 105kg		
	Inside Beam	: 2'11" / 0.89m	Recommended HP	: 25hp / 18.7kw		
	Tube Diameter	: 18" / 0.46m	Maximum HP	: 30hp / 22.4kw		

S T A N D A R D  F E A T U R E S	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Stringer System Welded Under Aluminum Deck</li><li>■ Life Line Around Tube</li><li>■ Non - Skid(CSM) Coated Fabric on Tube's Surface</li><li>■ Pressure Relief Valves</li><li>■ Drain Scuppers</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate</li></ul>	<ul style="list-style-type: none"><li>■ Aluminum Bow Eye</li><li>■ 4 Aluminum Davit Lifting Points</li><li>■ Aluminum Transom Tie Down &amp; Towing Rings</li><li>■ Aluminum Bow Tie Down &amp; Towing Rings</li><li>■ Deck Drain with Plug</li><li>■ Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric</li><li>■ Double Solid Rub Rails</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ 1 Front &amp; 4 Side Orca(CSM) Fabric Handles on Tubes</li></ul>	<ul style="list-style-type: none"><li>■ Paddles with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>

O P T I O N A L  F E A T U R E S	<ul style="list-style-type: none"><li>■ Tube Chaps</li><li>■ Boat Cover</li><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel Cleat</li><li>■ Lateral Fold Down Stainless Steel Cleat</li><li>■ Removable Rowing Seat</li><li>■ Fiberglass Console with Forward Seat</li><li>■ Fiberglass Console</li><li>■ Customized Aluminum Consoles &amp; Seats Upon Request</li></ul>	<ul style="list-style-type: none"><li>■ One Person Jockey Seat</li><li>■ Two Person Jockey Seat</li><li>■ Stainless Steel Helm Unit</li><li>■ Bow Locker/ Seat</li><li>■ Aluminum Console</li><li>■ Aluminum Lean On</li><li>■ 6 Gal. Portable Fuel Tank Installed in Bow Locker</li><li>■ Bench Seat with Storage</li></ul>





SPECS	Overall Length	: 13' / 3.96m	Number of Chambers	: 3	Shaft Length	: 20" / 50.8cm
	Overall Beam	: 6'7" / 2.00m	Person Capacity	: 7	RDC Design Category	: C
	Inside Length	: 9'10" / 3.00m	Weight	: 256lb / 116kg		
	Inside Beam	: 3'3" / 0.99m	Recommended HP	: 30hp / 22.4kw		
	Tube Diameter	: 18" / 0.46m	Maximum HP	: 40hp / 29.8kw		


STANDARDS FEATURES	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Stringer System Welded Under Aluminum Deck</li><li>■ Life Line Around Tube</li><li>■ Non - Skid (CSM) Coated Fabric on Tube's Surface</li><li>■ Pressure Relief Valves</li><li>■ Drain Scuppers</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate</li></ul>	<ul style="list-style-type: none"><li>■ Aluminum Bow Eye</li><li>■ 4 Aluminum Davit Lifting Points</li><li>■ Aluminum Transom Tie Down &amp; Towing Rings</li><li>■ Aluminum Bow Tie Down &amp; Towing Rings</li><li>■ Deck Drain with Plug</li><li>■ Heavy Duty 1670 DacTex Orca (CSM) Five Layer Coated Fabric</li><li>■ Double Solid Rub Rails</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ 1 Front &amp; 4 Side Orca (CSM) Fabric Handles on Tubes</li></ul>	<ul style="list-style-type: none"><li>■ Paddles with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>

OPTIONAL FEATURES	<ul style="list-style-type: none"><li>■ Tube Chaps</li><li>■ Boat Cover</li><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel Cleat</li><li>■ Lateral Fold Down Stainless Steel Cleat</li><li>■ Removable Rowing Seat</li><li>■ Fiberglass Console with Forward Seat</li><li>■ Fiberglass Console</li><li>■ Customized Aluminum Consoles &amp; Seats Upon Request</li></ul>	<ul style="list-style-type: none"><li>■ One Person Jockey Seat</li><li>■ Two Person Jockey Seat</li><li>■ Stainless Steel Helm Unit</li><li>■ Bow Locker/ Seat</li><li>■ Aluminum Console</li><li>■ Aluminum Lean On</li><li>■ 6 Gal. Portable Fuel Tank Installed in Bow Locker</li><li>■ Bench Seat with Storage</li></ul>

Profile

A 14    SUPERLIGHT

Professional Aluminum Boats

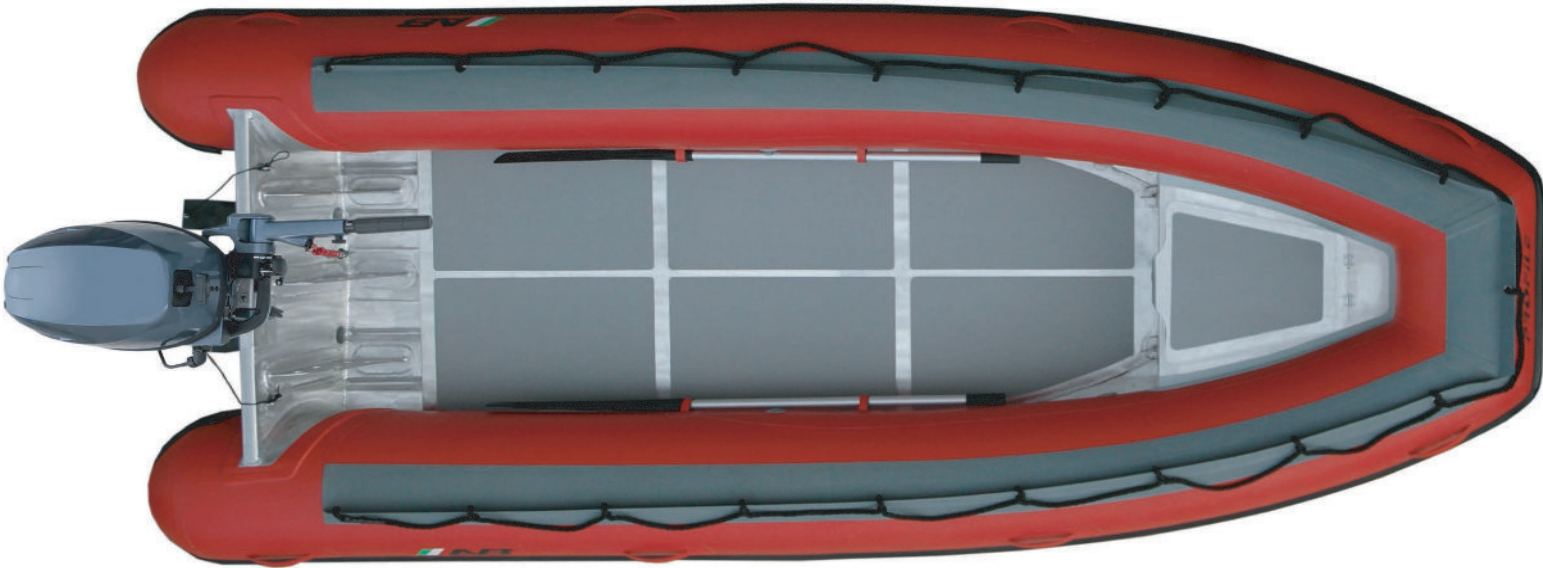

SPECS

Overall Length	: 14' / 4.27m	Number of Chambers	: 4	Shaft Length	: 20" / 50.8cm
Overall Beam	: 6'7" / 2.00m	Person Capacity	: 8	RDC Design Category	: C
Inside Length	: 10'10" / 3.30m	Weight	: 287lb / 130kg		
Inside Beam	: 3'3" / 0.99m	Recommended HP	: 40hp / 29.8kw		
Tube Diameter	: 19" / 0.48m	Maximum HP	: 50hp / 37.3kw		

STANDARD FEATURES

- Deep "V" Marine Grade Aluminum Hull
  - Stringer System Welded Under Aluminum Deck
  - Life Line Around Tube
  - Non - Skid(CSM) Coated Fabric on Tube's Surface
  - Pressure Relief Valves
  - Drain Scuppers
  - Heavy Duty Transom Knee
  - Non - Skid Rubber Floor Panels
  - Plastic External Transom Plate
  - Aluminum Internal Transom Plate
- Aluminum Bow Eye
  - 4 Aluminum Davit Lifting Points
  - Aluminum Transom Tie Down & Towing Rings
  - Aluminum Bow Tie Down & Towing Rings
  - Deck Drain with Plug
  - Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
  - Double Solid Rub Rails
  - Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
  - 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes
- Paddles with Aluminum Shaft
  - Paddle Holders
  - Hand Pump
  - Maintenance Kit
  - Owner's Manual
  - 3 Layer Reinforced Seams
  - Rubber Protector on Full Length of Keel

OPTIONAL FEATURES

- Tube Chaps
  - Boat Cover
  - Chock Set
  - Bow Step with Fold Down Stainless Steel Cleat
  - Lateral Fold Down Stainless Steel Cleat
  - Removable Rowing Seat
  - Fiberglass Console with Forward Seat
  - Fiberglass Console
  - Customized Aluminum Consoles & Seats Upon Request
- One Person Jockey Seat
  - Two Person Jockey Seat
  - Stainless Steel Helm Unit
  - Bow Locker/ Seat
  - Aluminum Console
  - Aluminum Lean On
  - 6 Gal. Portable Fuel Tank Installed in Bow Locker
  - Bench Seat with Storage





Profile

A 15SUPERLIGHT

Professional Aluminum Boats



S P E C S	Overall Length	: 15' / 4.57m	Number of Chambers	: 5	Shaft Length	: 20" / 50.8cm
	Overall Beam	: 6'9" / 2.06m	Person Capacity	: 9	RDC Design Category	: C
	Inside Length	: 11'8" / 3.55m	Weight	: 383lb / 174kg		
	Inside Beam	: 3'4" / 1.03m	Recommended HP	: 50hp / 37.3kw		
	Tube Diameter	: 19" / 0.48m	Maximum HP	: 60hp / 44.8kw		

S T A N D A R D F E A T U R E S	<ul style="list-style-type: none"><li>■ Deep "V" Marine Grade Aluminum Hull</li><li>■ Stringer System Welded Under Aluminum Deck</li><li>■ Life Line Around Tube</li><li>■ Non - Skid(CSM) Coated Fabric on Tube's Surface</li><li>■ Pressure Relief Valves</li><li>■ Drain Scuppers</li><li>■ Heavy Duty Transom Knee</li><li>■ Non - Skid Rubber Floor Panels</li><li>■ Plastic External Transom Plate</li><li>■ Aluminum Internal Transom Plate</li></ul>	<ul style="list-style-type: none"><li>■ Aluminum Bow Eye</li><li>■ 4 Aluminum Davit Lifting Points</li><li>■ Aluminum Transom Tie Down &amp; Towing Rings</li><li>■ Aluminum Bow Tie Down &amp; Towing Rings</li><li>■ Deck Drain with Plug</li><li>■ Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric</li><li>■ Double Solid Rub Rails</li><li>■ Push Push Plastic Non-Corrosive 2 Stage Inflation Valves</li><li>■ 1 Front &amp; 4 Side Orca(CSM) Fabric Handles on Tubes</li></ul>	<ul style="list-style-type: none"><li>■ Paddles with Aluminum Shaft</li><li>■ Paddle Holders</li><li>■ Hand Pump</li><li>■ Maintenance Kit</li><li>■ Owner's Manual</li><li>■ 3 Layer Reinforced Seams</li><li>■ Rubber Protector on Full Length of Keel</li></ul>

O P T I O N A L F E A T U R E S	<ul style="list-style-type: none"><li>■ Tube Chaps</li><li>■ Boat Cover</li><li>■ Chock Set</li><li>■ Bow Step with Fold Down Stainless Steel Cleat</li><li>■ Lateral Fold Down Stainless Steel Cleat</li><li>■ Removable Rowing Seat</li><li>■ Fiberglass Console with Forward Seat</li><li>■ Fiberglass Console</li><li>■ Customized Aluminum Consoles &amp; Seats Upon Request</li></ul>	<ul style="list-style-type: none"><li>■ One Person Jockey Seat</li><li>■ Two Person Jockey Seat</li><li>■ Stainless Steel Helm Unit</li><li>■ Bow Locker/ Seat</li><li>■ Aluminum Console</li><li>■ Aluminum Lean On</li><li>■ 6 Gal. Portable Fuel Tank Installed in Bow Locker</li><li>■ Bench Seat with Storage</li></ul>





S P E C S	Overall Length	: 16' / 4.88m	Number of Chambers	: 5	Shaft Length	: 20" / 50.8cm
	Overall Beam	: 7' / 2.14m	Person Capacity	: 10	RDC Design Category : C	
	Inside Length	: 12'8" / 3.85m	Weight	: 438lb / 199kg		
	Inside Beam	: 3'6" / 1.08m	Recommended HP	: 50hp / 37.3kw		
	Tube Diameter	: 21" / 0.53m	Maximum HP	: 60hp / 44.8kw		

STANDARDS  
FEATURES

- Deep "V" Marine Grade Aluminum Hull
- Stringer System Welded Under Aluminum Deck
- Life Line Around Tube
- Non - Skid(CSM) Coated Fabric on Tube's Surface
- Pressure Relief Valves
- Drain Scuppers
- Heavy Duty Transom Knee
- Non - Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate

- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
- Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
- Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
- Double Solid Rub Rails
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- 1 Front & 5 Side Orca(CSM) Fabric Handles on Tubes

- Paddles with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel

OPTIONAL  
FEATURES

- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat
- Fiberglass Console with Forward Seat
- Fiberglass Console
- Customized Aluminum Consoles & Seats Upon Request


- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit
- Bow Locker/ Seat
- Aluminum Console
- Aluminum Lean On
- 6 Gal. Portable Fuel Tank Installed in Bow Locker
- Bench Seat with Storage



Profile A

A 18

Professional Aluminum Boats

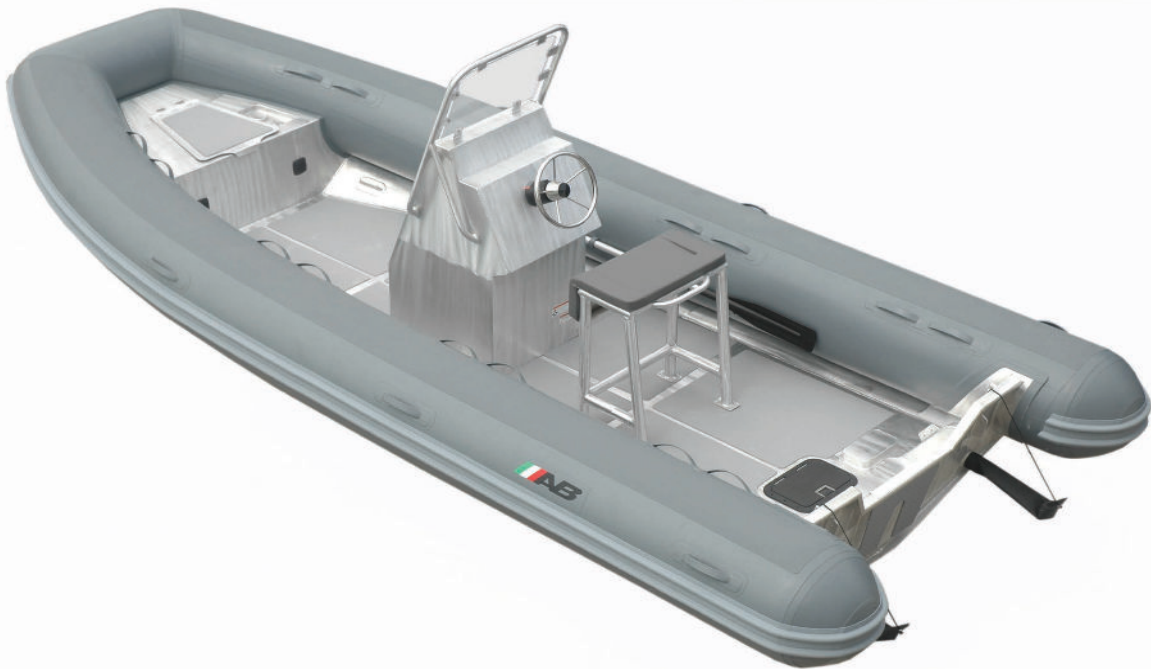

S P E C S

Overall Length	: 18' / 5.49m	Number of Chambers	: 5	Shaft Length	: 25" / 63.5cm
Overall Beam	: 7' 10" / 2.40m	Person Capacity	: 15	Gas Built in Tank	: 32 Gal / 120 L
Inside Length	: 14' 8" / 4.47m	Weight	: 859lb / 390kg	RDC Design Category	: C
Inside Beam	: 4' 3" / 1.30m	Recommended HP	: 90hp / 67.1kw		
Tube Diameter	: 21" / 0.53m	Maximum HP	: 115hp / 85.8kw		

S T A N D A R D  
F E A T U R E S

- Professional Deep "V" Marine GRADE Aluminum Hull
  - Stringer System Welded under Aluminum Deck
  - Heavy Duty Transom Knees
  - Integrated Marine Grade Aluminum Fuel Tank
  - Aluminum Keel Protector
  - Non-Skid Rubber Floor Panels
  - Plastic External Transom Plate
  - Aluminum Internal Transom Plate
  - Aluminum Bow Eye
  - 4 Aluminum Davit Lifting Points
  - Aluminum Transom Tie Down & Towing Rings
  - Aluminum Bow Tie Down & Towing Rings
  - Drain Scuppers
  - Life Line Around Tube
  - Pressure Relief Valves
  - Non - skid (CSM) Coated Fabric on Tube's Surface
- Heavy Duty 1670 Decitex Orca (CSM) Five Layer Coated Fabric
  - Double Solid Rub Rail
  - Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
  - 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
  - Hand Pump
  - Maintenance Kit
  - Owner's Manual
  - Closed Cell Foam Upholstery
  - Aluminum Console with Forward Seat & Cushion
  - Lean On
  - Bow Locker/Seat
  - Console Front Access Lid
  - Bow Step with Fold Down Stainless Steel Cleat & LED Running Lights
  - 360° LED White Light Navigation Pole
  - Lateral Fold Down Stainless Steel Cleat
  - Stainless Steel Console Grab Rail
- Plexiglass Windshield
  - 4 Waterproof Rocker Switches with Circuit Brakers
  - Battery Box
  - Battery Switch
  - Fuel and Water Separator Filter
  - Hydraulic Steering System
  - Stainless Steel Steering Wheel
  - Complete Tin Wiring & Heat Shrink Sealed Terminals
  - 3 Layer Reinforced Seams
  - Rubber Protector on Full Length of Keel
  - Stainless Steel Gas Springs
  - Automatic Bilge Pump
  - Paddles With Aluminum Shaft
  - Paddle Holders

O P T I O N A L  
F E A T U R E S

- Aluminum Light Arch
  - Tube Chaps
  - Boat Cover
  - Chock Set
  - Transom Ladder
  - Bimini Top with Stainless Steel Tubing
  - Console Cover
- Lifting Harness
  - Teak Floor
  - CD/Radio System
  - Compass
  - GPS
  - VHF Package
  - Towing Post
  - Engine Guard