

8VS

Open FiberglassTenders



ച

S

A &

 \vdash \sqcup SIL

ОШ

Overal Length Shaft Length : 8'6"/ 2.60m Number of Chambers : 3+1 : 15" / 38.1cm

Overal Beam 5'4"/1.64m **Person Capacity** RDC Design Category : C

Inside Length 5′10″/ 1.79m Weight : 125lb / 57kg

Inside Beam Recommended HP : 8hp / 6.0kw : 2'4"/ 0.72m

Tube Diameter : 16"/ 0.40m Maximum HP : 10hp / 7.5kw

Hand Laid Fiberglass Deep "V" Hull
 Stringer System Laminated into Hull
 Bow Locker/ Seat

- Diamond Shape Non Skid Deck
- Plastic External Transom Plate

- Aluminum Internal Transom Plate with Security Lip Orca (CSM) Five Layer Coated Fabric 3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points
 Stainless Steel Towing Rings & Tie Downs
 Deck Condensation Plug
- Deck Drain with Plug
- 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes
 2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes
 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes
 3 Layer Reinforced Seams
 Hand Pump
 Maintenance Kit
 Owner's Manual
 Additional Air Retaining Chamber Under the Floor

- Telescopic Oars with Aluminum Shaft Paddle Holders Removable Rowing Seat

- Hand Pump

- Bow Hatch Cushion
- Tube Chaps
- Boat Cover
- Chock Set

- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat



9VS

Open FiberglassTenders



Number of Chambers : 3 + 1

: 4

: 143lb / 65kg

: 9.9hp / 7.4kw

: 15hp / 11.2kw

ے

S

A A ∢ < \vdash \sqcup SH

⋖ д ш 0 н Hand Laid Fiberglass Deep "V" Hull
 Stringer System Laminated into Hu Stringer System Laminated into Hull Bow Locker/ Seat

Overal Length

Overal Beam

Inside Length

Inside Beam

Tube Diameter

Diamond Shape Non - Skid Deck

Plastic External Transom Plate
Aluminum Internal Transom Plate with Security Lip
Orca (CSM) Five Layer Coated Fabric
3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves

: 9'6"/ 2.90m

: 5'7"/1.72m

: 6'9"/ 2.06m

: 2'8"/ 0.81m

: 17"/ 0.43m

Raised Double Rub Rail Stainless Steel Bow Eye

4 Stainless Steel Davit Lifting Points
 Stainless Steel Towing Rings & Tie Downs
 Deck Condensation Plug

Person Capacity

Recommended HP

Maximum HP

Weight

1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes Maintenance Kit
2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes Owner's Manual
2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes Additional Air Retaining Chamber Under the Floor
3 Layer Reinforced Seams
Oarlock Bases

Telescopic Oars with Aluminum Shaft Paddle Holders Removable Rowing Seat

RDC Design Category : C

Shaft Length

: 15"/38.1cm

Bow Hatch Cushion

Tube Chaps

Boat Cover

Chock Set

■ Bow Step with Fold Down Stainless Steel Cleat

■ Lateral Fold Down Stainless Steel Cleat

■ Removable Stern Seat

■ Bimini Top



10VS

Open FiberglassTenders



ے

S

A A ∢ ∢ \vdash \sqcup SH

а ш 0 ц

- **Overal Length** : 10'6"/3.19m Number of Chambers : 3 + 1Shaft Length : 15" / 38.1cm **Overal Beam Person Capacity** : 5 RDC Design Category : C : 5′7″/ 1.72m Inside Length Weight : 7′7″/ 2.31m : 169lb / 77kg Inside Beam Recommended HP : 2'8"/ 0.81m : 15hp / 11.2kw **Tube Diameter** : 17"/ 0.43m Maximum HP : 25hp / 18.7kw
 - Hand Laid Fiberglass Deep "V" Hull
 - Stringer System Laminated into Hull Bow Locker/ Seat
- Diamond Shape Non Skid Deck
- Plastic External Transom Plate

- Aluminum Internal Transom Plate with Security Lip
 Orca (CSM) Five Layer Coated Fabric
 3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves

Bow Step with Fold Down Stainless Steel Cleat

Lateral Fold Down Stainless Steel Cleat

- Stainless Steel Bow Eye

Bow Hatch Cushion

■ Tube Chaps

Boat Cover

Chock Set

- 4 Stainless Steel Davit Lifting Points
 Stainless Steel Towing Rings & Tie Downs
 Deck Condensation Plug

- Deck Oriain with Plug

 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes

 2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes

 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes

 3 Additional Air Retaining Chamber Under the Floor
- 3 Layer Reinforced Seams


- Telescopic Oars with Aluminum Shaft Paddle Holders Removable Rowing Seat

- Removable Stern Seat
- Bimini Top
- Fiberglass Console
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steel Helm Unit



12VS

Open FiberglassTenders

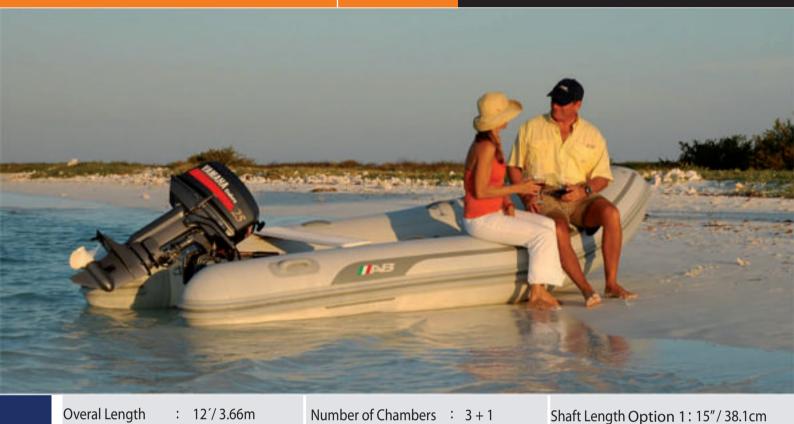

Shaft Length Option 2:20"/50.8cm **Overal Beam Person Capacity** : 6 : 6'/ 1.82m RDC Design Category: C Inside Length : 8'9"/ 2.67m Weight : 198lb / 90kg

Inside Beam Recommended HP : 20hp / 14.9kw : 2'9"/ 0.84m

Maximum HP **Tube Diameter** : 18"/ 0.46m : 30hp / 22.4kw

- Hand Laid Fiberglass Deep "V" Hull
- Stringer System Laminated into Hull

- Diamond Shape Non Skid Deck
 Plastic External Transom Plate
 Aluminum Internal Transom Plate with Security Lip
- Orca (CSM) Five Layer Coated Fabric
- 3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- Raised Double Rub Rail Stainless Steal Bow Eye

- 4 Stainless Steal Davit Lifting Points
- Stainless Steal Towing Rings & Tie Downs
- Deck Condensation Plug
- Deck Drain with Plug 1 Front & 2 Side Orca (CSM) Fabric Handles on Tubes
- 2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes
- 2 Inside Stern Single Orca (CSM) Fabric Handles on Tubes
- 3 Layer Reinforced Seams Paddle with Aluminum Shaft

- Paddle Holders
- Removable Stern Seat
- Hand Pump
- Maintenance Kit Owner's Manual
- Additional Air Retaining Chamber Under the Floor

- **Bow Hatch Cushion**
- **Tube Chaps**
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steal Cleat
- Lateral Fold Down Stainless Steal Cleat

- Removable Rowing Seat
- Bimini Top
- Fiberglass Console
- Fiberglass Console with Forward Seat
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steal Helm Unit



⋖⋖

 \vdash \square

SП

111

ОШ

13VS

Open FiberglassTenders



Overal Beam Inside Length

Overal Length

: 13'/3.96m

Number of Chambers : 3 + 1

Shaft Length : 20" / 50.8cm

: 6'4"/ 1.94m

Person Capacity : 7 RDC Design Category : C

: 9'9"/ 2.97m

Weight

: 293lb / 133kg

Inside Beam : 3'1"/ 0.94m Recommended HP

: 30hp / 22.4kw

Tube Diameter : 18"/ 0.46m Maximum HP : 40hp / 29.8kw

2 ж ш A A ∢ < μш SH

Δш 0 ц

ے

2

- Hand Laid Fiberglass Deep "V" Hull
 Stringer System Laminated into Hul
 Bow Locker/ Seat
- Stringer System Laminated into Hull Bow Locker/ Seat
- Diamond Shape Non Skid Deck
- Plastic External Transom Plate

- Aluminum Internal Transom Plate
 Orca (CSM) Five Layer Coated Fabric
 3 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- Raised Double Rub Rail
- Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points Stainless Steel Towing Rings & Tie Downs Deck Condensation Plug

- Deck Drain with Plug
 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
 2 Inside Bow Sets of 2 Orca (CSM) Fabric Handles on Tubes
 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes
- 3 Layer Reinforced Seams
- Paddle with Aluminum Shaft
- Paddle Holders

- Removable Stern Seat Hand Pump
- Maintenance Kit Owner's Manual
- Additional Air Retaining Chamber Under the Floor

- Bow Hatch Cushion
- Boat Cover
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat

- Bimini Top
- Fiberglass Console
- Fiberglass Console with Forward Seat
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steel Helm Unit



14VS

Open FiberglassTenders



Overal Beam

Overal Length

14′/ 4.27m

Number of Chambers : 4+1

Shaft Length : 20" / 50.8cm

: 6'4"/1.94m

Person Capacity : 8 RDC Design Category : C

Inside Length

: 10'10"/3.30m

Weight

: 348lb / 158kg

Inside Beam

: 3'1"/ 0.94m

Recommended HP

: 40hp / 29.8kw

Tube Diameter

: 19"/ 0.48m

Maximum HP : 50hp / 37.3kw

2 ж ш A & ⋖⋖ μ SП

а ш Ош

- Hand Laid Fiberglass Deep "V" Hull
- Stringer System Laminated into Hull

- Bow Locker/ Seat
 Diamond Shape Non Skid Deck
 Plastic External Transom Plate
 Aluminum Internal Transom Plate
- Orca (CSM) Five Layer Coated Fabric
- 4 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
- Raised Double Rub Rail Stainless Steel Bow Eye

- 4 Stainless Steel Davit Lifting Points
- Stainless Steel Towing Rings & Tie Downs
- Deck Condensation Plug
- Deck Drain with Plug
 1 Front & 4 Side Orca (CSM) Fabric Handles on Tubes
 2 Inside Bow Sets of 3 Orca (CSM) Fabric Handles on Tubes
- 2 Inside Stern Double Orca (CSM) Fabric Handles on Tubes
- 3 Layer Reinforced Seams Paddle with Aluminum Shaft Paddle Holders

- Removable Stern Seat
- Hand Pump

- Maintenance Kit Owner's Manual Additional Air Retaining Chamber Under the Floor

- **Bow Hatch Cushion**
- **Boat Cover**
- **Chock Set**
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat

- Bimini Top
- Fiberglass Console
- Fiberglass Console with Forward Seat
- Bench Seat with Storage
- Two person Jockey Seat
- Stainless Steel Helm Unit

