


Profile

A 11

SUPERLIGHT

Professional Aluminum Boats

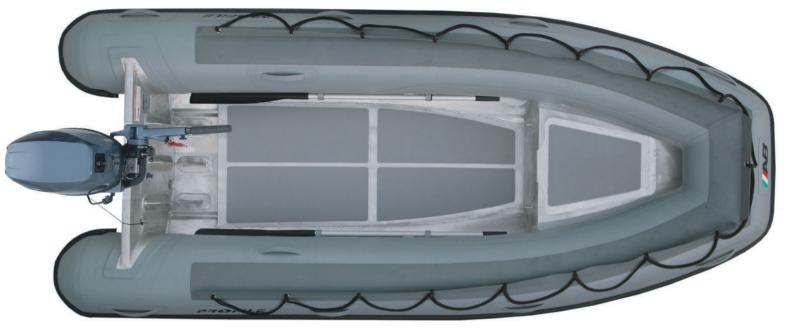

	Overal Length	:	11′6″/ 3.50m	Number of Chambers	:	3	Maximum HP	:30hp / 22.4kw
S P E C S	Overal Beam	:	5′7″/ 1.70m	Person Capacity	:	6	Shaft Length	:20″/50.8cm
	Inside Length	•	8′6″/ 2.60m	Weight	:	214lb / 97kg	RDC Design Category	: С
	Inside Beam	:	2′8″/ 0.81m	Weight with Bow Locker	:	229lb/ 104kg		
	Tube Diameter	:	17″/ 0.43m	Recommended HP	:	20hp /14.9kw		

- Deep "V" Marine Grade Aluminum Hull
- Stringer System Welded Under Aluminum Deck

ND പ്പ

ЧЧ

 $\Box \supset$

z⊢

 $\triangleleft \triangleleft$

μш

ωщ

<u>ہ ר</u>

∢ш

ZĽ

0⊃

ΓA

ு ய

Оц

- Life Line Áround Tube Non Skid(CSM) Coated Fabric on Tube's Surface
- Pressure Relief Valves
- Drain Scuppers
- Heavy Duty Transom Knee
- Non Skid Rubber Floor Panels
- Plastic External Transom Plate Aluminum Internal Transom Plate

- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings
 Aluminum Bow Tie Down & Towing Rings
 Deck Drain with Plug
- Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
- Double Solid Rub Rails
- Push Push Plastic Non-Corrosive 2 Stage Inflation Valves 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes

Paddles with Aluminum Shaft

3 Layer Reinforced Seams

Rubber Protector on Full Length of Keel

Paddle Holders

Hand Pump

Maintenance Kit
 Owner's Manual

- Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank
- Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings
- Tube Chaps
- Boat Cover
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat
- Fiberglass Console with Forward Seat
- Customized Aluminum Consoles & Seats Upon Request



- Fiberglass Console
- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit
- Aluminum Console
- Aluminum Lean On