
Profile

A 14 SUPERLIGHT

Professional Aluminum

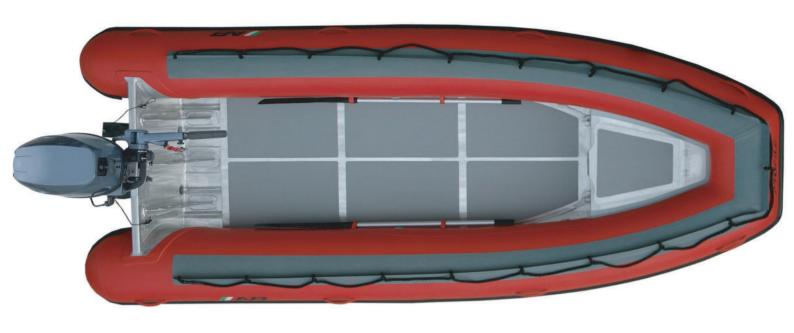

ے S Overal Length Number of Chambers : 4 : 14'/ 4.27m Maximum HP : 50hp/37.3kw **Overal Beam** : 6'7"/ 2.00m **Person Capacity** : 8 Shaft Length : 20" / 50.8cm Inside Length 10′10″/3.30m Weight : 287lb/130kg RDC Design Category : C Inside Beam : 3'3"/ 0.99m Weight with Bow Locker: 305lb/138kg **Tube Diameter** : 19"/ 0.48m Recommended HP : 40hp /29.8kw

2 ~ ш A A ⋖

⋖ \vdash \sqcup SЧ

ΨЫ

ZŒ

Ош

- Deep "V" Marine Grade Aluminum Hull
- Stringer System Welded Under Aluminum Deck
- Life Line Around Tube
- Non Skid(CSM) Coated Fabric on Tube's Surface
- Pressure Relief Valves
- Drain Scuppers
- Heavy Duty Transom Knee
- Non Skid Rubber Floor Panels
- Plastic External Transom Plate
- Aluminum Internal Transom Plate

- Aluminum Bow Eye
- 4 Aluminum Davit Lifting Points
- Aluminum Transom Tie Down & Towing Rings Aluminum Bow Tie Down & Towing Rings
- Deck Drain with Plug
 - Heavy Duty 1670 Decitex Orca(CSM) Five Layer Coated Fabric
- Double Solid Rub Rails
 Push Push Plastic Non-Corrosive 2 Stage Inflation Valves
 1 Front & 4 Side Orca(CSM) Fabric Handles on Tubes
- Paddles with Aluminum Shaft
- Paddle Holders
- Hand Pump
- Maintenance Kit
- Owner's Manual
- 3 Layer Reinforced Seams
- Rubber Protector on Full Length of Keel

- Bow Locker Storage with Vent to Fit a 6 Gal Portable Fuel Tank
- Portable 6 Gal Fuel Tank Installed in Bow Locker with Fittings
- **Tube Chaps**
- **Boat Cover**
- Chock Set
- Bow Step with Fold Down Stainless Steel Cleat
- Lateral Fold Down Stainless Steel Cleat
- Removable Rowing Seat
- Fiberglass Console with Forward Seat
- Customized Aluminum Consoles & Seats Upon Request

- Fiberglass Console
- One Person Jockey Seat
- Two Person Jockey Seat
- Stainless Steel Helm Unit
- Aluminum Console
- Aluminum Lean On

