

STANDARD FEATURES

- Marine Grade Aluminum Hulls
- Bow Eye
- Drain Scuppers
- Pressure Relief Valves
- Solid Double Rub Rail
- Tow Rings
- 3-4 Aluminum Davit Lifting Points
- Non-Skid (CSM) Coated Fabric On Top of Tube
- SEADEK® EVA FOAM NON-SKID FLOOR
- 4 Layers Reinforced Seams
- Heavy Duty 1670 Decitex
- Orca (CSM) Coated Fabric
- Lifeline Around Tube
- Hand Pump
- Maintenance Kit
- Owner's Manual



OPTIONAL FEATURES

- Bow Locker/Seat with Vent & Storage with Capacity to Fit a 6-Gal Portable Fuel Tank
- Portable 6-Gal Fuel Tank Installed With Fittings" Bow Locker
- Aluminum or Fiberglass Console With Plexiglass Windshield & Grab Rail
- Fiberglass or Aluminum Jockey Consoles
- Customized Aluminum Console and Seats
- Aluminum Jockey Seat
- Leaning Bolster
- Mechanical Steering System
- Hydraulic Steering System
- Standard Rigging From Factory
- SS LED Navigation Light
- All Around LED Anchor Light
- Automatic Bilge Pump
- Master Switch
- Fuel/Water Separator & Canister
- Sunbrella Fabric Boat Cover
- Chock Set
- Lifting Harness
- Electronics Upon Request
- Color Boat Customization

SPECIFICATION	IMPERIAL	METRIC
OVERALL LENGTH	11' 6"	3.5 M
OVERALL BEAM	5' 7"	1.7 M
INSIDE LENGTH	8' 6"	2.6 M
INSIDE BEAM	2' 8"	0.81 M
TUBE DIAMETER	17"	0.43 M
NUMBER OF CHAMBERS	3	3
PERSON CAPACITY	6	6
WEIGHT	227 LBS	103 KG
WEIGHT WITH BOW LOCKER	247 LBS	112 KG
RECOMMENDED HP	20 HP	14.9 KW
MAXIMUM HP	30 HP	22.4 KW
SHAFT LENGTH	15"	38.1 CM
RDC DESIGN CATEGORY	C	C
DEADRISE	6°	6°
ALUMINUM HULL THICKNESS	0.125 in	3.18 MM
ALUMINUM TRANSOM THICKNESS	0.190 in	4.78 MM

STANDARD FEATURES

- Marine Grade Aluminum Hulls
- Bow Eye
- Drain Scuppers
- Pressure Relief Valves
- Solid Double Rub Rail
- Tow Rings
- 3-4 Aluminum Davit Lifting Points
- Non-Skid (CSM) Coated Fabric On Top of Tube
- SEADEK® EVA FOAM NON-SKID FLOOR
- 4 Layers Reinforced Seams
- Heavy Duty 1670 Decitex
- Orca (CSM) Coated Fabric
- Lifeline Around Tube
- Hand Pump
- Maintenance Kit
- Owner's Manual



OPTIONAL FEATURES

- Bow Locker/Seat with Vent & Storage with Capacity to Fit a 6-Gal Portable Fuel Tank
  - Portable 6-Gal Fuel Tank Installed With Fittings" Bow Locker
  - Aluminum or Fiberglass Console With Plexiglass Windshield & Grab Rail
  - Fiberglass or Aluminum Jockey Consoles
  - Customized Aluminum Console and Seats
  - Aluminum Jockey Seat
  - Leaning Bolster
- Mechanical Steering System
  - Hydraulic Steering System
  - Standard Rigging From Factory
  - SS LED Navigation Light
  - All Around LED Anchor Light
  - Automatic Bilge Pump
  - Master Switch
  - Fuel/Water Separator & Canister
  - Sunbrella Fabric Boat Cover
  - Chock Set
  - Lifting Harness
  - Electronics Upon Request
  - Color Boat Customization

SPECIFICATION	IMPERIAL	METRIC
OVERALL LENGTH	12'	3.66 M
OVERALL BEAM	5' 11"	1.8 M
INSIDE LENGTH	8' 10"	2.7 M
INSIDE BEAM	2' 10"	0.86 M
TUBE DIAMETER	18"	0.46 M
NUMBER OF CHAMBERS	3	3
PERSON CAPACITY	6	6
WEIGHT	242 LBS	110 KG
WEIGHT WITH BOW LOCKER	262 LBS	119 KG
RECOMMENDED HP	25 HP	18.7 KW
MAXIMUM HP	30 HP	22.4 KW
SHAFT LENGTH	15"	38.1 CM
RDC DESIGN CATEGORY	C	C
DEADRISE	6°	6°
ALUMINUM HULL THICKNESS	0.125 in	3.18 MM
ALUMINUM TRANSOM THICKNESS	0.190 in	4.78 MM



## STANDARD FEATURES

- Marine Grade Aluminum Hulls
- Bow Eye
- Drain Scuppers
- Pressure Relief Valves
- Solid Double Rub Rail
- Tow Rings
- 3-4 Aluminum Davit Lifting Points
- Non-Skid (CSM) Coated Fabric On Top of Tube
- SEADEK® EVA FOAM NON-SKID FLOOR
- 4 Layers Reinforced Seams
- Heavy Duty 1670 Decitex
- Orca (CSM) Coated Fabric
- Lifeline Around Tube
- Hand Pump
- Maintenance Kit
- Owner's Manual



## OPTIONAL FEATURES

- Bow Locker/Seat with Vent & Storage with Capacity to Fit a 6-Gal Portable Fuel Tank
- Portable 6-Gal Fuel Tank Installed With Fittings" Bow Locker
- Aluminum or Fiberglass Console With Plexiglass Windshield & Grab Rail
- Fiberglass or Aluminum Jockey Consoles
- Customized Aluminum Console and Seats
- Aluminum Jockey Seat
- Leaning Bolster
- Mechanical Steering System
- Hydraulic Steering System
- Standard Rigging From Factory
- SS LED Navigation Light
- All Around LED Anchor Light
- Automatic Bilge Pump
- Master Switch
- Fuel/Water Separator & Canister
- Sunbrella Fabric Boat Cover
- Chock Set
- Lifting Harness
- Electronics Upon Request
- Color Boat Customization

### SPECIFICATION

### IMPERIAL

### METRIC

OVERALL LENGTH	13'	3.96 M
OVERALL BEAM	6' 5"	1.96 M
INSIDE LENGTH	9' 10"	3 M
INSIDE BEAM	3' 3"	0.99 M
TUBE DIAMETER	18"	0.46 M
NUMBER OF CHAMBERS	3	3
PERSON CAPACITY	7	7
WEIGHT	282 LBS	128 KG
WEIGHT WITH BOW LOCKER	295 LBS	134 KG
RECOMMENDED HP	30 HP	22.4 KW
MAXIMUM HP	40 HP	29.8 KW
SHAFT LENGTH	20"	50.8 CM
RDC DESIGN CATEGORY	C	C
DEADRISE	6°	6°
ALUMINUM HULL THICKNESS	0.125 in	3.18 MM
ALUMINUM TRANSOM THICKNESS	0.190 in	4.78 MM



## STANDARD FEATURES

- Marine Grade Aluminum Hulls
- Bow Eye
- Drain Scuppers
- Pressure Relief Valves
- Solid Double Rub Rail
- Tow Rings
- 3-4 Aluminum Davit Lifting Points
- Non-Skid (CSM) Coated Fabric On Top of Tube
- SEADEK® EVA FOAM NON-SKID FLOOR
- 4 Layers Reinforced Seams
- Heavy Duty 1670 Decitex
- Orca (CSM) Coated Fabric
- Lifeline Around Tube
- Hand Pump
- Maintenance Kit
- Owner's Manual



## OPTIONAL FEATURES

- Bow Locker/Seat with Vent & Storage with Capacity to Fit a 6-Gal Portable Fuel Tank
- Portable 6-Gal Fuel Tank Installed With Fittings" Bow Locker
- Aluminum or Fiberglass Console With Plexiglass Windshield & Grab Rail
- Fiberglass or Aluminum Jockey Consoles
- Customized Aluminum Console and Seats
- Aluminum Jockey Seat
- Leaning Bolster
- Mechanical Steering System
- Hydraulic Steering System
- Standard Rigging From Factory
- SS LED Navigation Light
- All Around LED Anchor Light
- Automatic Bilge Pump
- Master Switch
- Fuel/Water Separator & Canister
- Sunbrella Fabric Boat Cover
- Chock Set
- Lifting Harness
- Electronics Upon Request
- Color Boat Customization

### SPECIFICATION

### IMPERIAL


### METRIC

OVERALL LENGTH	14'	4.27 M
OVERALL BEAM	6' 5"	1.96 M
INSIDE LENGTH	10' 10"	3.3 M
INSIDE BEAM	3' 3"	0.99 M
TUBE DIAMETER	19"	0.48 M
NUMBER OF CHAMBERS	4	4
PERSON CAPACITY	8	8
WEIGHT	317 LBS	144 KG
WEIGHT WITH BOW LOCKER	335 LBS	152 KG
RECOMMENDED HP	40 HP	29.8 KW
MAXIMUM HP	50 HP	37 KW
SHAFT LENGTH	20"	50.8 CM
RDC DESIGN CATEGORY	C	C
DEADRISE	6°	6°
ALUMINUM HULL THICKNESS	0.125 in	3.18 MM
ALUMINUM TRANSOM THICKNESS	0.190 in	4.78 MM



## STANDARD FEATURES

- Marine Grade Aluminum Hulls
- Bow Eye
- Drain Scuppers
- Pressure Relief Valves
- Solid Double Rub Rail
- Tow Rings
- 3-4 Aluminum Davit Lifting Points
- Non-Skid (CSM) Coated Fabric On Top of Tube
- SEADEK® EVA FOAM NON-SKID FLOOR
- 4 Layers Reinforced Seams
- Heavy Duty 1670 Decitex
- Orca (CSM) Coated Fabric
- Lifeline Around Tube
- Hand Pump
- Maintenance Kit
- Owner's Manual

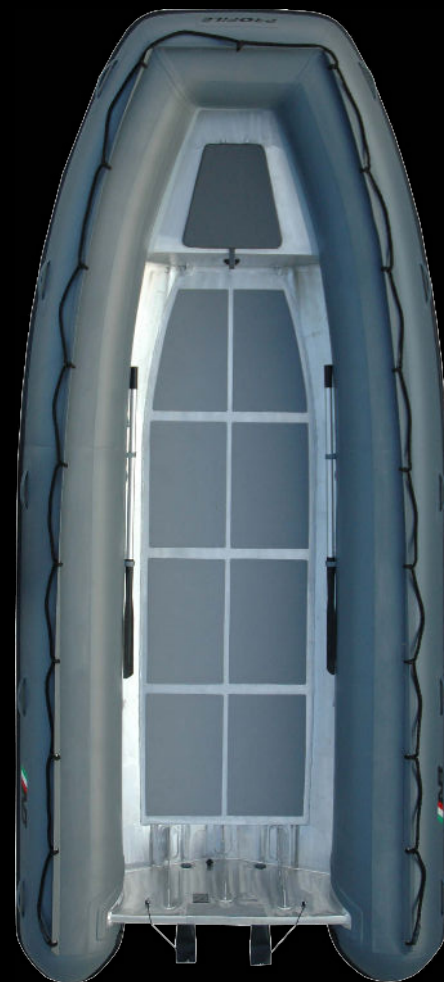

## OPTIONAL FEATURES

- Bow Locker/Seat with Vent & Storage with Capacity to Fit a 6-Gal Portable Fuel Tank
- Portable 6-Gal Fuel Tank Installed With Fittings" Bow Locker
- Aluminum or Fiberglass Console With Plexiglass Windshield & Grab Rail
- Fiberglass or Aluminum Jockey Consoles
- Customized Aluminum Console and Seats
- Aluminum Jockey Seat
- Leaning Bolster
- Mechanical Steering System
- Hydraulic Steering System
- Standard Rigging From Factory
- SS LED Navigation Light
- All Around LED Anchor Light
- Automatic Bilge Pump
- Master Switch
- Fuel/Water Separator & Canister
- Sunbrella Fabric Boat Cover
- Chock Set
- Lifting Harness
- Electronics Upon Request
- Color Boat Customization

### SPECIFICATION

### IMPERIAL

### METRIC

OVERALL LENGTH	16'	4.88 M
OVERALL BEAM	7'	2.14 M
INSIDE LENGTH	12' 8"	3.85 M
INSIDE BEAM	3' 6"	1.08 M
TUBE DIAMETER	21"	0.53 M
NUMBER OF CHAMBERS	5	5
PERSON CAPACITY	10	10
WEIGHT	480 LBS	218 KG
WEIGHT WITH BOW LOCKER	501 LBS	227 KG
RECOMMENDED HP	50 HP	37 KW
MAXIMUM HP	60 HP	44.8 KW
SHAFT LENGTH	20"	50.8 CM
RDC DESIGN CATEGORY	C	C
DEADRISE	6°	6°
ALUMINUM HULL THICKNESS	0.190 in	4.78 MM
ALUMINUM TRANSOM THICKNESS	0.190 in	4.78 MM